

# The excellence continues with the next ColorTouch™ X ISO



## ColorTouch™ X ISO expanding your capabilities

### Simple - Accurate - Flexible - Powerful

#### New Features:

- Expanded Wavelength Range - Provides improved analysis of UV region
- New Intuitive Operator Interface - Simple and responsive
- Data Trending - Trend data over time, grade run, shifts, etc.
- Simultaneous Grade Tracking - Track multiple grades from different sources at the same time
- Pass/Fail Alerts - Immediate notification of out of spec measurements
- APP Technology - Provides the foundation for adding new features as they become available or the development of custom APPS for your specific measurement or calculation

Since 1980 Technidyne has been producing instruments that meet the ISO Optical Standards for the global pulp and paper industry. In 1994 Technidyne brought to market the ColorTouch™ which quickly set the standard for functionality, precision and dependability.

The ColorTouch™ X ISO brings together a powerful set of tools to meet the demands of the brightness, color, fluorescence and ERIC950 markets. In addition to these traditional applications, the expanded wavelength range of the ColorTouch™ X ISO provides a higher level of accuracy and capabilities.

No other instrument in the market today can match the ColorTouch™ X ISO for capabilities, functionality and quality.

When quality matters, Technidyne is there

#### Headquarters


100 Quality Avenue  
New Albany, IN 47150 USA  
+1.812.948.2884  
spectrum@technidyne.com  
www.technidyne.com

#### Canada

540 Meloche  
Dorval, Quebec H9P2T2  
Canada  
+1.514.631.1188  
sales@technidyne.ca

#### Asia

388 Exchange Tower  
29th Floor  
Sukumvit Road  
Bangkok, Thailand 10110  
+66.2.101.9203  
paulc@technidyne.com

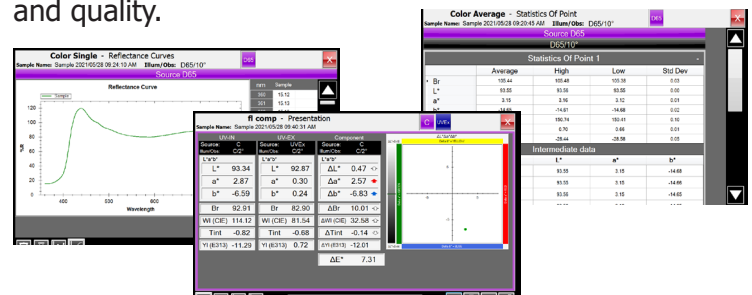

## Key Features

Touch-Screen Interface

Data Export in CSV and XML via Ethernet or USB

FTP server connection capability

Remote Support w/ embedded TeamViewer

Automated Calibration w/swingIn "working" standard

APP Technology built-in for adding new features

Exact conformance to ISO standards

## Touchscreen Operation

Point & Touch and the ColorTouch™ X ISO does the rest  
Preprogrammed test routine to allow for easy set-up and testing

Does not require an external PC  
Automatic Calibration  
Swing-in Calibration Standard

## Advanced Data Analysis

Trending data allows for tracking grades over several samples

Compare multiple samples on various color plots  
Establish optical tolerances on grades for PASS/FAIL analysis

## Spectral Data Capabilities

Spectrophotometric data for comprehensive understanding of dyes, fillers and other colorants  
Greater accuracy of colorimetric data  
Thorough analysis of metameric color matches

**and much more**



## ColorTouch™ X ISO Specifications

| Parameter                                   | Specification                    | Parameter                          | Specification  |
|---|----------------------------------|------------------------------------|--|
| Light Source                                | Pulsed Xenon                     | Lamp Life (number of measurements) | 500,000+   |
| Geometry                                    | Dual Beam, d/0                   | Specimen Area Measured             | 30mm   |
| Photometric Nonlinearity                    | 0.1%                             | Measurement Time                   | 2 seconds  |
| Repeatability (white tile avg. 20 readings) | < 0.01 CIELAB DE                 | Reproducibility (Inter-instrument) | <0.20 CIELAB DE  |
| Measurement Range Reflectance               | 0-200%                           | Wavelength                         | 360-780nm  |
| Detector                                    | CCD 131,000 Pixels               | Spectrometer                       | Dual Blaze Grating   |
| Bandpass                                    | 10 nm                            | Reflectance Data Intervals         | 1, 5, 10, 20nm   |
| Sources                                     | D65, C, UV-EX, UV1, UV2          | Illuminants                        | A, B, C, D50, D55, D65, D75, F2, F7, F11                             |
| Observers                                   | CIE 2°, 10°                      | Color Scales                       | X,Y,Z/R(x),R(y),R(z)/L,a,b/L*,a*,b*/L*,C*,h/DWL,PUR,x,y,Y            |
| Whiteness                                   | CIE, ASTM, HUNTER                | Tint                               | CIE, HUNTER  |
| Yellowness                                  | HUNTER                           | Opacity                            | Yes  |
| Flourescence                                | Yes                              | Flourescence                       | Yes  |
| Stored Standards                            | Yes                              | Color Difference                   | Yes  |
| ERIC  | Optional                         | Display                            | 10.1 Color TFT 1024 x 600 WSVGA, PCT Multi Touch Screen              |
| Communications                              | USB, Ethernet                    | Hard Disk Drive                    | 32 GB Sata SSD   |
| Operating Temperature                       | 13-32 degrees Celsius            | USB port                           | Yes (4)  |
| Automatic Calibration                       | Yes (Built-In Swing In Standard) | Industry Standards                 | ISO: 2469,2470,2471,11475,11476, 5631/TAPPI: 519, 525, 527, 534, 560 |
| Weight                                      | 45 # /20.4 kg                    | Height                             | 23.5" /60 cm   |